




Overview

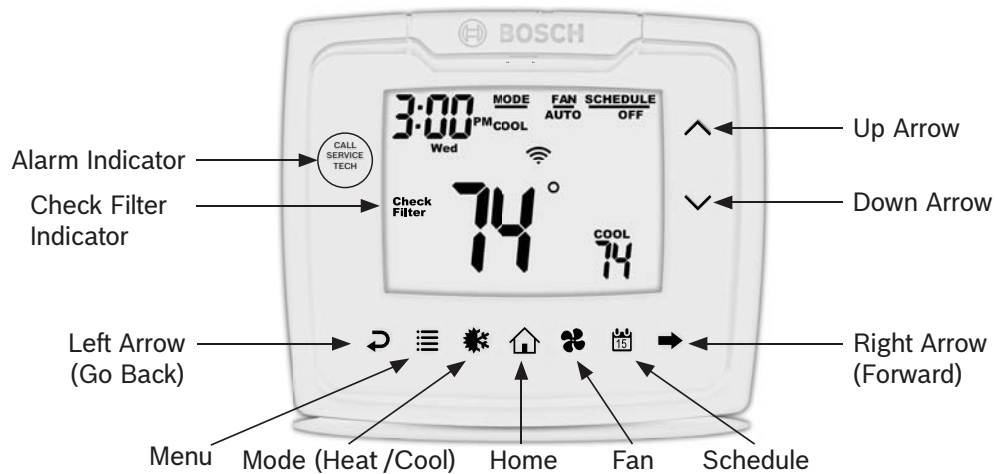


Standard Features

Standard Features

- ▶ Heat pump compatible
- ▶ 7-Day, 5-2-Day, or 5-1-1-Day programmable
- ▶ Touch-technology with illuminated options
- ▶ Hardwired with battery backup
- ▶ Unit status messaging
- ▶ Configurable for multiple systems
- ▶ Large display with backlight
- ▶ Selectable Fahrenheit or Celsius
- ▶ Icon indicator lights
- ▶ Relay outputs – minimum voltage drop in thermostat
- ▶ Service alarm
- ▶ Fault detection and history – stores up to 20 events
- ▶ 5 Years Limited Warranty



Models and Part Numbers				
Description	Part Number	Heat	Cool	Humidity
3H/2C Touch-Technology Thermostat	8-733-942-499	3	2	No
2H/2C/Hum Touch-Technology Thermostat	8-733-944-325	2	2	Yes

Physical Data	
Description	Value
Electrical Rating:	24 VAC (18-30 VAC), 1 amp maximum per output terminal, 5 amp maximum total load
DC Power:	3.0 VDC (2 "AA" Alkaline batteries)
Temperature Control Range:	45°F to 90°F (7°C to 32°C) Accuracy: ±1°F (±0.5°C)
Anti-short Cycle	4 minutes (bypass anti-short cycle delay by returning to OFF mode and pressing the  icon).
Backlight Operations:	15 seconds
Humidity Control (If Applicable):	10% - 80%

